securistyle

CI/SfB Reference (31.49) X

June 2009

DETACHABLE RESTRICTOR

DETACHABLE RESTRICTOR

KEY RELEASE RESTRICTOR STAY FOR USE WITH STERLING AND STORM BALANCED COMMERCIAL HINGES

- Tested to BS 6375 Part 2:2009
- Can withstand a force in excess of 1000N when opened at the restricted position
- Austenitic 304* stainless steel for enhanced corrosion resistance
- Compatible with all Securistyle commercial hinges
- 10 year guarantee (details available upon request)

RELEASE KEY
Dedicated release key allowing the restrictor stay to be detached.

LOCKING PIN
Unique locking pin design allowing simple detachment/ engagement of the restrictor stay.

HEAVY DUTY FRICTION SLIDER
Stainless steel/plastic composite slider to give maximum strength yet perform with the smoothest of action.

* Austenitic (was 304) stainless steel to BS EN ISO 10088/2 Grade 1.4301 for enhanced corrosion resistance.

Manufactured in UK

Securistyle Ltd. Kingsmead Industrial Estate, Princess Elizabeth Way, Cheltenham, Glos. GL51 7RE, UK.
Tel: +44 (0) 1242 221200 Fax: +44 (0) 1242 228194/520828 E-mail: info@securistyle.co.uk
Website: www.securistyle.co.uk

DETACHABLE RESTRICTOR

PRODUCT SPECIFICATION

- Easy to fit no routing required
- Can be used on windows without reinforcement
- Suitable for 16mm to 18mm cavity heights
- Non handed product
- Keys available separately

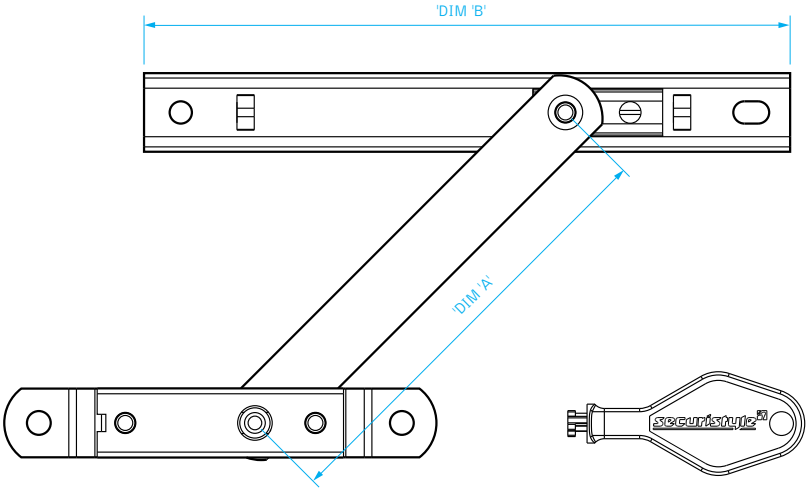

R7437 RELEASE KEY

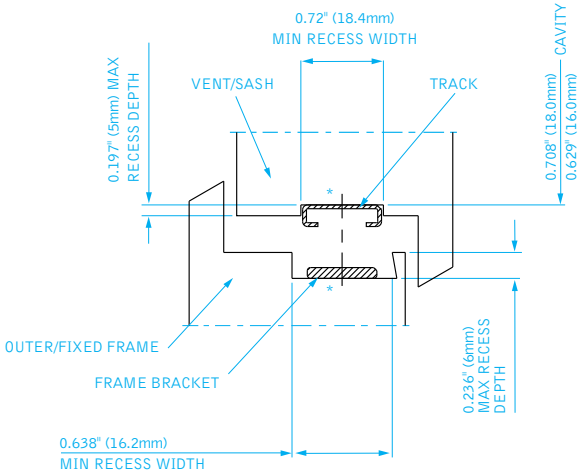

* CAN BE FITTED OFFSET

DETACHABLE RESTRICTOR STAY

Part Number	Description	Dim 'A' (in/mm)	Dim 'B' (in/mm)	Boxed Qty.
SDR4	4'' Detachable Restrictor Assembly	4/101.6	5.9/150	50
SDR6	6'' Detachable Restrictor Assembly	6/152.4	7.87/200	50
SDR8	8'' Detachable Restrictor Assembly	8/203.2	7.87/200	50
SDR10	10'' Detachable Restrictor Assembly	10/254	9.84/250	50
R7437	Release Key			10

GGF

INVESTOR IN PEOPLE

BSEN ISO9001
Cert No QO5105

Due to our policy of continual improvement we reserve the right to alter specifications without notice. It is the responsibility of the window manufacturer to ensure that the finished window meets the required performance and safety specification.

All transactions are subject to our standard conditions of supply, which are available on request.

Designed by Earl & Thompson Marketing Limited. UK. Tel:01452 627100