Multifold 30E

Top hung, end folding hardware for interior timber or aluminium doors.

Features

- Galvanised or stainless steel ball-bearing hangers
- Equal width door leaves
- For doors or serving hatches

Specifications

- Max leaf mass: 30kg
- Max leaf height: 2400mm
- Max leaf width: 600mm
- Leaf thickness: 32-44mm
- Recommended: 2 or 4 leaves hinged together and to an end pivot. For 2 leaves, bottom guiding is optional. For 4 leaves, bottom guiding is recommended. No swing leaves.

The area of a single sliding leaf should be related to all other factors.

Components

- 100S steel or 100A aluminium top track
- 100MF hangers
- 40/21N guides
- 21A aluminium channel
- MF pivot set
- 503NA/GA flush pull handle
- 442S or 442B butt hinged
- 452 holdback catch
- 455 roller catch
- 488x150mm flush bolt

Note

- All fittings available in stainless steel for all coastal applications.
- Various finishes available.

Brought to you by

GHI ARCHITECTURAL SOLUTIONS

info@ghi.co.za | **www.ghi.co.za**

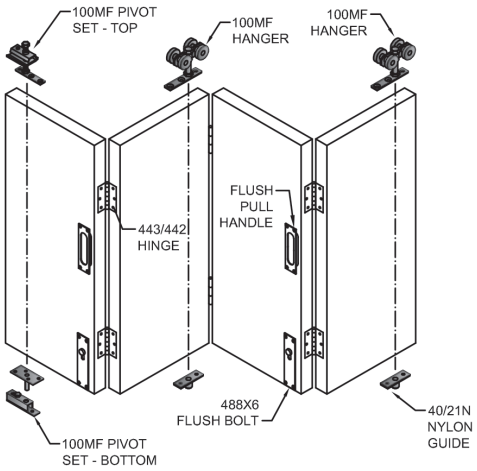

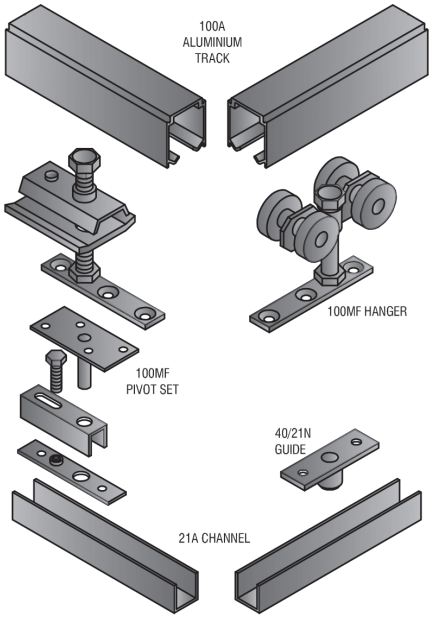

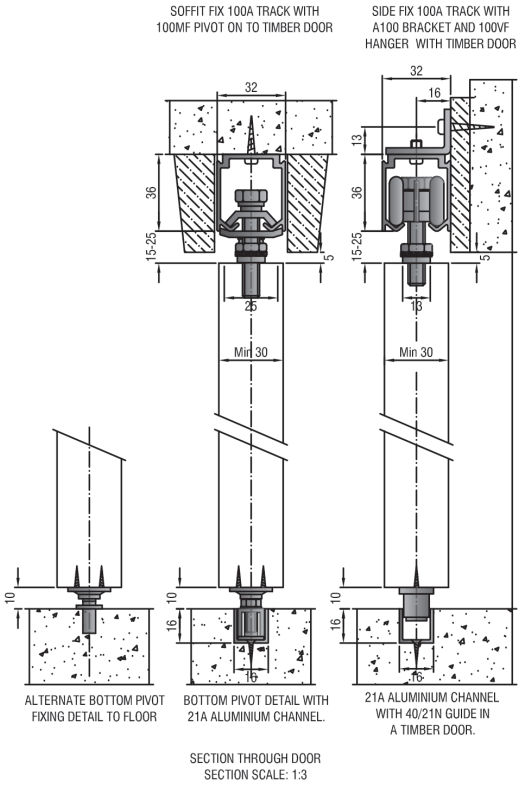

Mechanism

Hillaldam SLIDING DOOR SYSTEMS

Sliding / Folding Door Systems

Domestic, Commercial, Shop Fitting, Hospital, Industrial

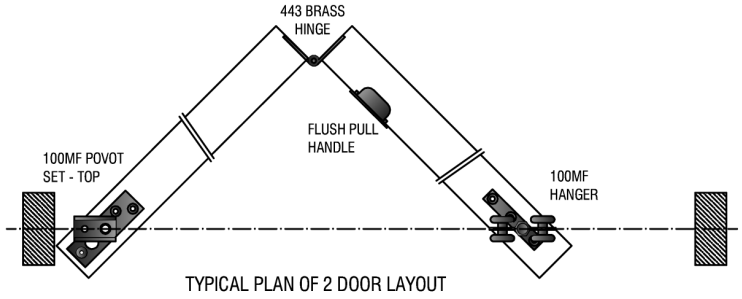

TYPICAL PLAN OF 2 DOOR LAYOUT

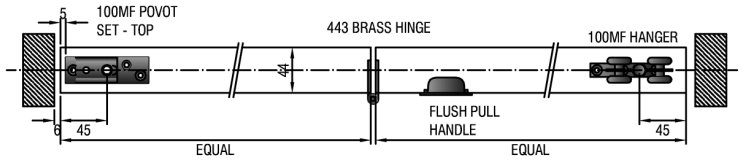

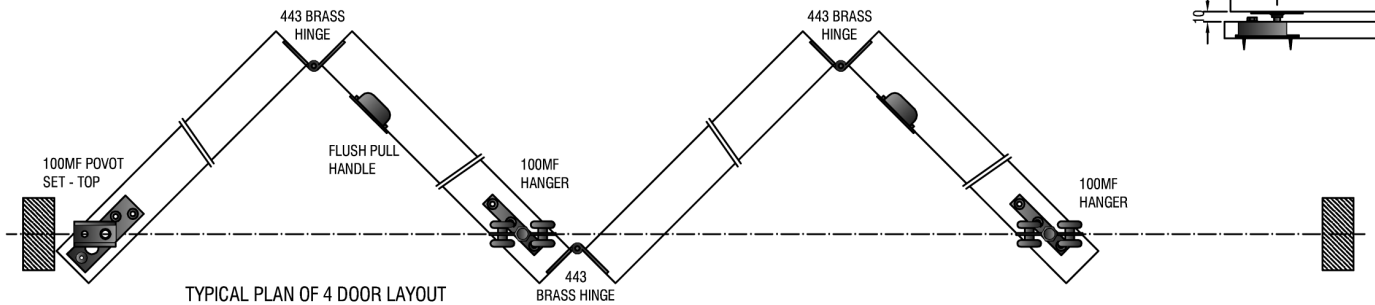

TYPICAL PLAN OF 4 DOOR LAYOUT

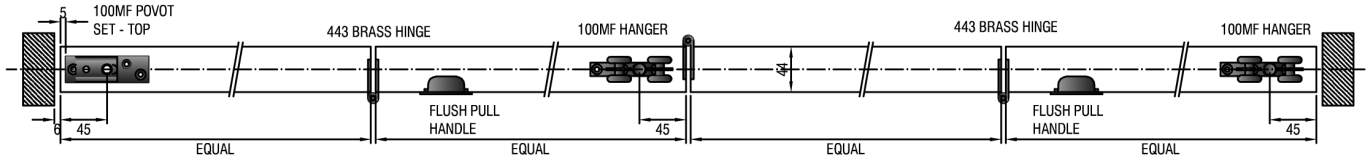

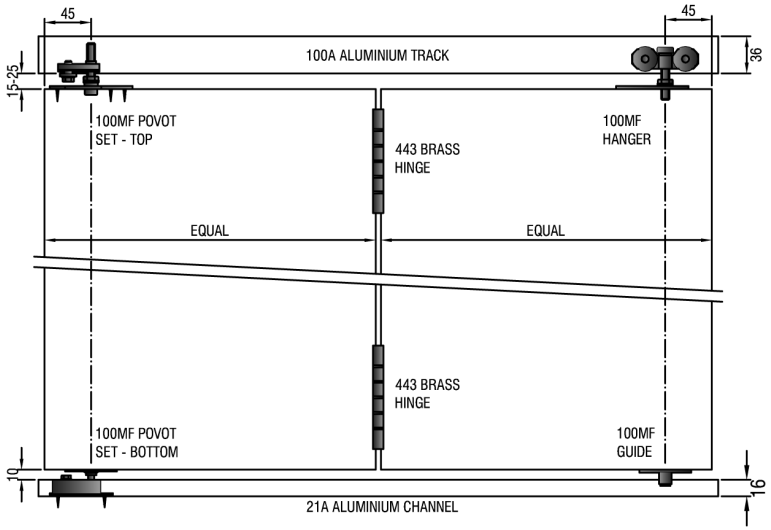

ELEVATION OF TYPICAL 2 DOOR LAYOUT

Multifold 30E

Brought to you by

GHI ARCHITECTURAL SOLUTIONS

info@ghi.co.za | **www.ghi.co.za**

Hillaldam SLIDING DOOR SYSTEMS

Sliding / Folding Door Systems

Domestic, Commercial, Shop Fitting, Hospital, Industrial